




# SEAT 25

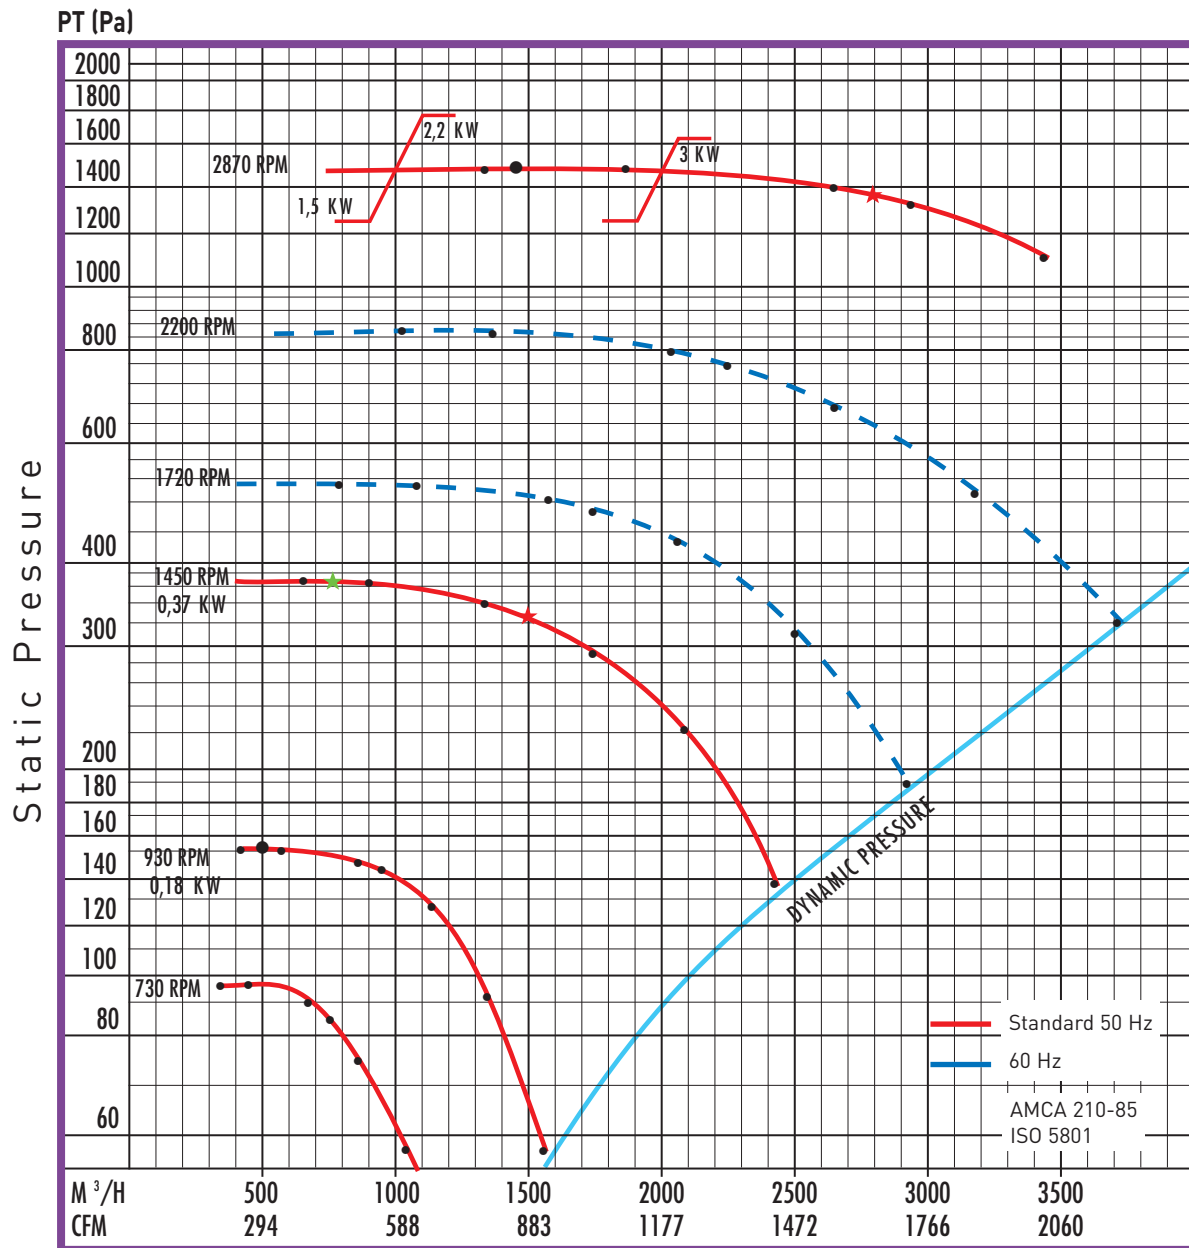

Ducted inlet/Ducted outlet  
Casing noise

R.P.M.	dB (A)
950	43
1435	53
2870	68




Type B  
Ducted outlet

R.P.M.	dB(A)	dB
950	61	67
★ 1450	73	76
2870	87	89

Noise ratings in accordance with ISO 5801.  
Visit our website for details.

Noise level in octaves (dB)

Freq. Octave Hz	1450 R.P.M. ★ 660 m <sup>3</sup> /h	1450 R.P.M. ★ 1300 m <sup>3</sup> /h	2870 R.P.M. ★ 3080 m <sup>3</sup> /h
125	70,1	72,2	84
250	70,8	70,6	86,9
500	70,1	72,1	85
1000	69,8	70,5	87,2
2000	59,8	62,1	82,3
4000	54,7	59,2	79,6

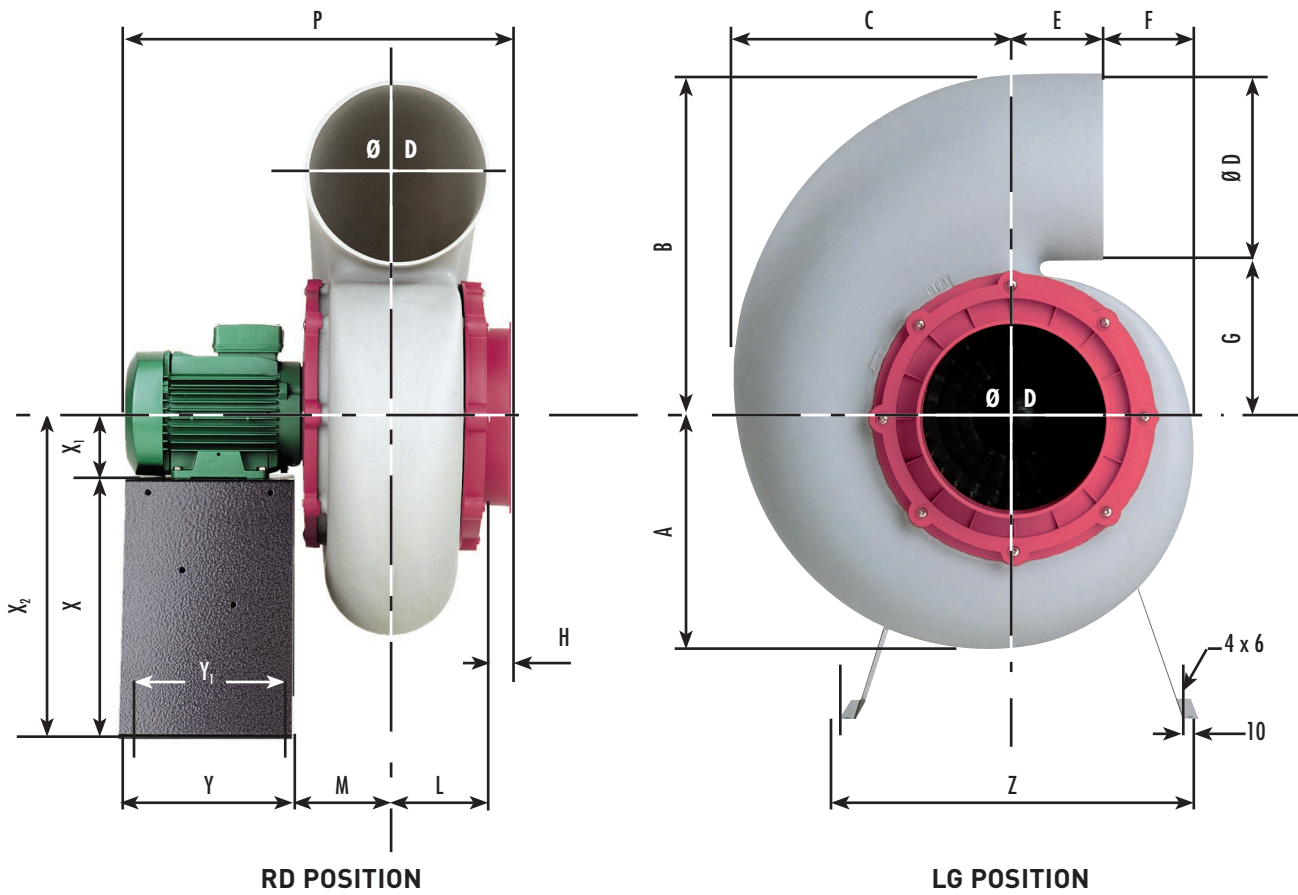

Available  
in **ATEX** version

**Dimensional data (mm) - Metal stand does not come standard with fan (see accessories pricing).  
The motor frame size may vary upon type of motor used.**

RPM	A	B	C	Ø D	E	F	G	H	L	M	P	Y	Y <sub>1</sub>	Z	X	X <sub>1</sub>	X <sub>2</sub>
930 / 1450	248	365	310	200	103	92	165	35	95	105	430	180	160	420	300	71	371
2870	248	365	310	200	103	92	165	35	95	105	515	180	160	420	300	90	390

**Handings are viewed from inlet side - 45 degree adjustable**

<b>LG 0</b>	<b>LG 45</b>	<b>LG 90</b>	<b>LG 135</b>	<b>LG 180</b>	<b>LG 225</b>	<b>LG 270</b>	<b>LG 315</b>
<b>RD 0</b>	<b>RD 45</b>	<b>RD 90</b>	<b>RD 135</b>	<b>RD 180</b>	<b>RD 225</b>	<b>RD 270</b>	<b>RD 315</b>